



Model: WAS900-MS-420MA

Wireless 4-20mA Transmitter/Receiver Set



FEATURES & BENEFITS

- Provides Wireless Bridge for 4-20mA Loop Signal
- Receiver Output Mirrors Transmitter Input
- Receiver Provides 4-20mA or 1-5V DC Output
- Up To 6 Mile Line-of-site Transmit/Receive Distance
- 12-24V DC Operation
- NEMA 4, 4X PCT Plastic Enclosures
- Pre-configured, Ready-To-Operate
- Sold As Transmitter/Receiver Matched Set
- License Free Radio Operation


APPLACATIONS

- Process Transmitter Signals
- Valve Positioning & Control
- Remote Sensor Monitoring

DESCRIPTION

The WAS900-MS-420MA Wireless Analog Transmitter/Receiver System allows for remotely monitoring or controlling equipment from a distance up to 6 miles away using license free wireless 900MHz communication. Each set features one 4-20mA analog signal input and output. Both the transmitter and receiver are also equipped with one contact closure input that is used to control an open-collector output on the opposing unit for additional control or alarm functionality

Example Application: Level Transmitter Sending Readings to a Remote Process Meter

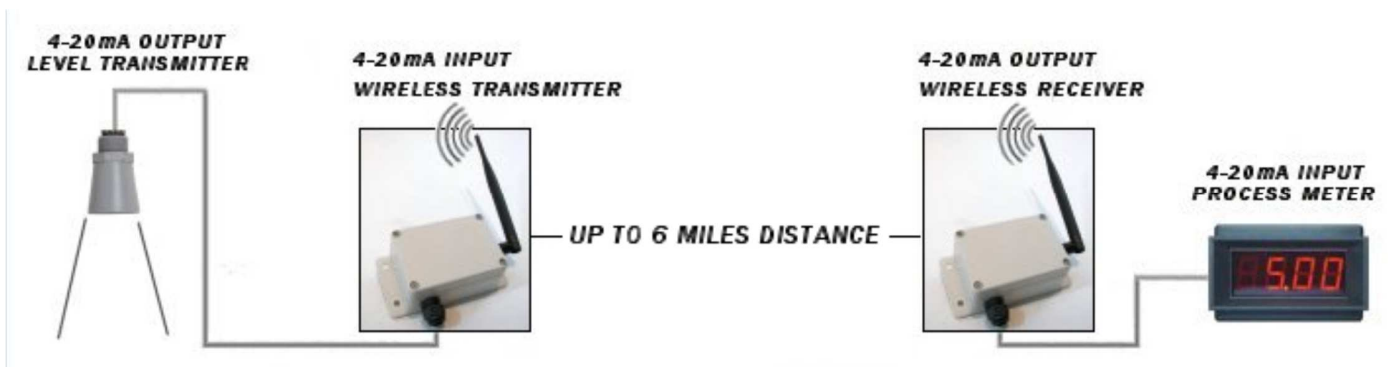

General Specifications

Radio Frequency: 900MHz
Regulatory: FCC Part 15 (No license required)
Process Input Lines: One 4-20mA
Signal Transmit/Receive Accuracy: +/- 0.5% of range
Open Input Condition: Output goes below 1mA
Lost RF Signal Condition: Output holds last value received
Maximum Loop Resistance: 600 Ohms @ 24V DC
Reading Update Rate: 250ms
Antenna Connection: RP-SMA
Antennas: 5dbi, Omni-directional (Included)
Transmit/Receive Distance:
 with included antennas: Urban 1000ft, Line-of-site 3 Miles
 with optional antennas: Urban 1600ft, Line-of-site 6 Miles
Transmitter/Receiver Code Matching: Factory set
Wire Connection: Terminal Blocks
Operating Temperature: -22 to 113 °F (-30 to 45 °C)
Enclosures: Plastic Din-rail

Transmitter Specifications

RF Power Output: 100mW
RF Output Impedance: 50 Ohm nominal
RF Data Rate: 250 kbps
Operating Power: 12 - 24V DC @ 3W max
Process Input: Analog 4-20mA

Receiver Specifications

Receive Sensitivity: -100 dBm
Operating Power: 12 - 24V DC @ 3W max
Process Output: Analog 4-20mA or 1-5V DC

Model: WAS900-MS-420MA



Includes 5dbi Antennas and 9' Antenna Extension Cables



Optional Long Distance Antenna Set

Regulatory Approvals

FCC(USA) - OUR-XBEEPRO
 IC (Canada) - 4214A-XBEEPRO

Model Number	Description
WAS900-MS-420MA	Wireless Din-rail Mount 4-20mA Transmitter/Receiver Set (USA/CANADA)

Available Options

Model Number	Description
DRWC-900-LRANT	Optional Long Range Directional Antenna (up to 6 Mile line-of-site)

Note: Continued product improvements make specifications subject to change without notice. Check www.imagineinstruments.com for the latest product information and updates

Level Sensor and Process Meter shown are not included and are shown for reference only.

© 2017 :: Imagine Instruments LLC :: 4500 Williams Drive, Ste 212-318 :: Georgetown, TX 78633 :: p. 512.778.6850
 e-mail: info@imagineinstruments.com :: www.imagineinstruments.com

Released: 12 December, 2017 :: Rev: A